PLUG AND HOOK FASTENING SOLUTIONS

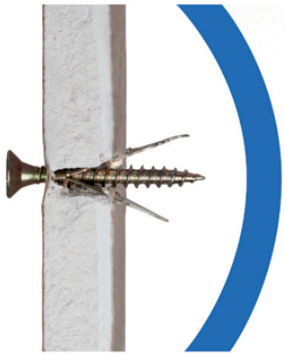

ADVANTAGES

))) Quick and easy installation

))) Multi-use, adapts to a wide range of solid and hollow supports: plasterboard and plaster blocks, concrete, cellular concrete, hardboard, stone, solid and hollow brick, fiber cement, panel of compressed wood fibers, breeze blocks, External Insulation (ETICS), etc.

APPLICATIONS

No-drill solutions

Plug

- Fastening on plasterboard
- For installing pipework and electrical equipment
- Plug can be nailed or screwed without pre-drilling
- Jagged tip for easy insertion
- Flush head
- Can be removed without damage

Drill solutions for heavy loads

Concrete slab anchoring

- For hanging air conditioning and ventilation units, or suspended ceilings underneath concrete slabs
- For indoor and outdoor use
- Mounting with specialized tool
- **CSTB certification no. EPOD/06-05 and EPOD/06-04 A**

ARaymond®
MORE THAN FASTENING

TECHNICAL SPECIFICATIONS







Item No.	Design	Pre-hole diameter (ØR)	Screw diameter (ØD)	Panel thickness (F)	Support's* material	Length x width (lxb)	Material**	Quantity per box
129063000 ARayvis		-	Ø7,5	9-26	1 - 2	Ø10 x 25	PA12-30%FV-Nr	4000
055813009 Gold		-	Ø3,5 to 5 x 30 mini	3-13	1-5-10-11	12 x 30	C45E-ZnCr3	5000
017232004 XL		6 for supports n° 2 and 4	Ø3 to 5 x 45 mini	13-26	1-2-4-10-12	16 x 43	C67S-ZnCr3	1300
055340000 Tristar		-	Ø4,5 x 50 mini	9-13	1	22 x 43	SSt	2500
054622000 Hook HK		8	-	30 mini	3-6-7-8-9	13 x 50	SSt	3000
204000000 Hook HKS		8	-	30 mini	3-6-7-8-9	29 x 50	SSt	2500
055072000 Cap HK		-	-	-		25 x 20	PP-Gr	3000
207067000 Installation tool HK and HKS		-	-	-	-	-	PPC-Nr	50

* **Support's material: 1)** Plasterboard • **2)** Plaster block • **3)** Concrete • **4)** Cellular concrete • **5)** Hardboard • **6)** Stone • **7)** Solid brick • **8)** Hollow brick • **9)** Breeze block • **10)** Fiber cement • **11)** Panel of compressed wood fibers • **12)** External Insulation (ETICS)

Dimensions in mm. For further information, please contact us.

** **Material:**
- **PA12-30%GF-Bk**: Polyamide 12 - 30% glass fibers - Black
- **PA66-Gr**: Polyamide 66 - Grey
- **C45E-ZnCr3 / C67S-ZnCr3**: Quenched steel - Corrosion protection: Zn + Cr3 (salt spray hold 408h RR)
- **Sst**: Stainless steel
- **DC04**: Soft steel
- **PP-Gr**: Polypropylene - Grey
- **PPC-Bk**: Polypropylene copolymer - Black

ARaymond / **PROIG** 5674 - Crédit photo : ARaymond Network, Franck Ardito, Istockphoto.

ARAYMOND FRANCE SAS

1 Rue Louis Besançon
38120 Saint-Égrève

contact-batiment@araymond.com
Tel. + 33 4 56 52 62 58
www.araymond-building.com

© *ARAYMOND FRANCE SAS, (Registered N°: Grenoble 352 948 434) – 113 Cours Berriat - BP 157 - 38019 Grenoble cedex 1 - France has designed this brochure.

** "ARaymond Network" means a network of companies which have a license of use of ARAYMOND®. This brochure is provided for information purposes only and does not constitute an offer or an agreement. ARAYMOND FRANCE SAS makes no warranty or representation whatsoever, express or implied, including but not limited to the accuracy, reliability, novelty, completeness, fit for a particular purpose or merchantability of the information contained in it. If you need further information, please contact ARAYMOND FRANCE SAS.

ARaymond®
MORE THAN FASTENING