





# TIGER CLIP™


203297005 / 203697005 / 205288000



I-Beams



C-Structure



L-Structure



))) QUICK and EASY


))) SAFE :  
TOOL-FREE MANUAL INSTALLATION

))) VERSATILITY :  
CAN BE USED WITH MANY ACCESSORIES  
3 sizes for supports from 2 to 24 mm

))) RESISTANT

))) INDOOR and OUTDOOR USE

## ) Applications




Ventilation and air conditioning




Suspended ceiling



Suspended lighting



Cable trays



Tubes, ducts and electrical accessories

## Technical description

References : **203297005 / 203697005 / 205288000**

Thicknesses :      2-8 mm                      8-16 mm                      16-24 mm

))) Quenched steel // Corrosion protection ZnFI-ZnAl

Salt spray hold 480 hours red rust




))) Resistance : static load up to 120 daN<sup>1)</sup> on M6 rod, safety factor 1:4



(CSTB certifications n° ED/05-022 and EPOD/06-04A)

1) = indicative value for information purposes.

## Installation

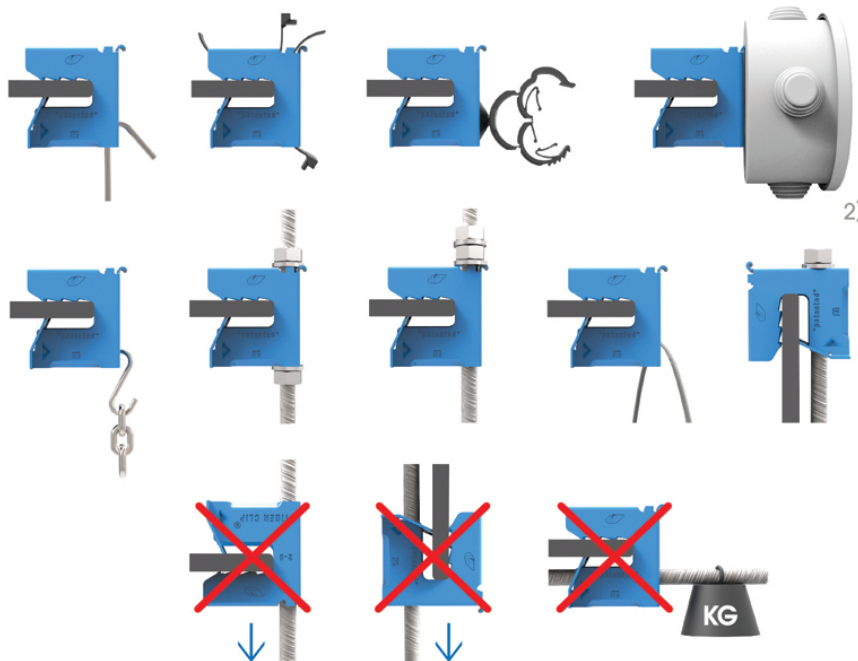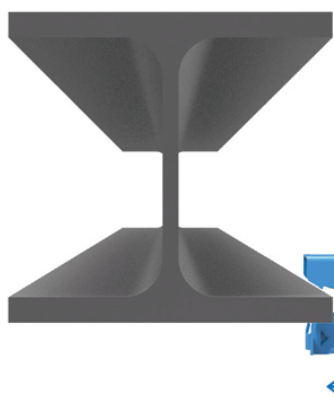

**Edge clip**  
Ref. 013778002  
(wood screws  
Ø 4,5 mm)



**Removable strap**  
Ref. 014691004 (Ø 6-45 mm)  
014749002 (Ø 24-85 mm)



**Smart clip**  
Ref. 132029000 (Ø 3-16 mm)  
055473000 (Ø 11-18 mm)



2) Application example :  
junction box fixing with ST4.2 screws  
or wood screws Ø4.5 mm

