


FASTENINGS FOR SUPPORTS



ADVANTAGES


-))) Safety: tool-free manual installation
-))) Simplicity: this single item replaces many different products
-))) Versatility:
 - 3 sizes (2-8, 8-16, 16-24 mm) adapted to threaded M6 rods, smooth rods, cables, collars, hooks, etc.
 - Indoor and outdoor use
-))) Strength: static load up to 120 kg on the M6 rod, 1:4 safety factor

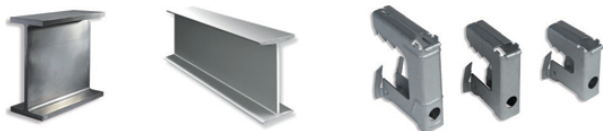

APPLICATIONS

Fastenings for supports



- Fastens on I-beams
- Mounting smooth or threaded rods, cables, etc.
- Hanging suspended ceilings, cable management, pipe and electrical cable tubes, securing lighting, mounting junction boxes, etc.



CERTIFICATIONS

CSTB reports no. ED/05-022 and EPOD/06-04A

TECHNICAL SPECIFICATIONS



Item No.	Panel thickness (F)	Hole diameter (Ø C)	Height (h)	Length x width (lxb)	Material thickness	Material*	Quantity per box
203297005 Tiger clip	2-8	6,6	30	28x19	0,7	C67S-M2.0-T	1000
203697005 Tiger clip	8-16	6,6	38	30x19	0,7	C67S-M2.0-T	800
205288000 Tiger clip	16-24	6,6	47,2	40x19	0,7	C67S-M2.0-T	450

Dimensions in mm. For further information, please contact us.

COMPLEMENTARY PRODUCTS



Removable ties

Item No.	Design	Tube diameter (ØD1)	Width (b)	Length (L)	Material*	Quantity per box
012526000		8-20	7	100	PA12-Nr	2500
012528000		10-70	9	250	PA12-Nr	1200
014749002		24-85	9	300	PA66-Nr	2500
208596000 Double tie		2-38 ; 3-36,5	4,8	151,6	PA66-Na	6000

Dimensions in mm. For further information, please contact us.



Tube supports

Item No.	Design	Tube diameter (ØD1)	Length x width (lxb)	Tube height (h)	Material*	Quantity per box
055473000 Smart clip		11-18	22,6x10	22,5-25,5	PPC-Nr	900
132029000 Smart clip		3-16	32x20	21-27	PPC-Nr	800

Dimensions in mm. For further information, please contact us.



Sheet metal

Item No.	Design	Panel thickness (F)	Screw diameter	Length x width (lxb)	Hole diameter	Material thickness	Material*	Quantity per box
013778002		0,7-1,75	ST 4,2	16,5x8	5	0,5	C67S-M2.0	7500

Dimensions (mm).
For further information, please contact us.

* Material:

- **C67S-M2.0-T:** Quenched steel-corrosion protection: ZnFl-ZnAl (Salt spray hold 480h RR)
- **PA12-Bk:** Polyamide 12 - Black
- **PA66-Bk:** Polyamide 66 - Black
- **PA66-Na:** Polyamide 6 - Natural
- **PPC-Bk:** Polypropylene copolymer - Black
- **C67S-M2.0:** Quenched steel-corrosion protection: ZnFl-ZnAl (Salt spray hold 480h RR)

ARAYMOND FRANCE SAS

1 Rue Louis Besançon
38120 Saint-Égrève

contact-batiment@araymond.com
Tel. + 33 4 56 52 62 58
www.araymond-building.com

ARaymond 
MORE THAN FASTENING